


SPECIFICATIONS

(Typical values stored at 20°C for one year)

| | |
|--|---------------------|
| ◆ Nominal capacity (at 3.0mA/20°C/68°F/2.0V cut-off) | 3.6Ah |
| ◆ Nominal voltage | 3.6V |
| ◆ Max. recommended continuous current (Higher current can be available upon consulting) | 60mA |
| ◆ Max. pulse current capability ★ | 150mA |
| ◆ Operating temperature range | -55 ~+85°C |
| ◆ Lithium metal content | approx. 0.95g |
| ◆ Weight | 24g |
| ◆ Volume | 10.6cm ³ |
| ◆ UL Approval | MH28122 |

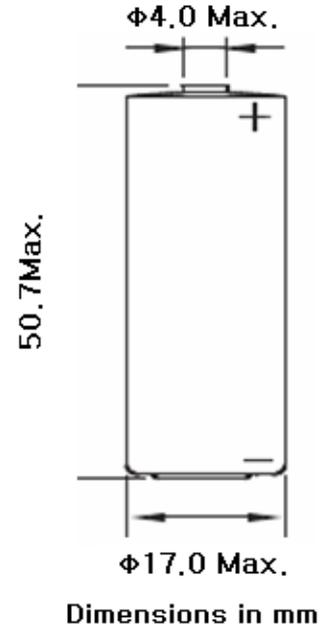

Available Terminal Type

STD, T1, T2, T3, T3/R, T3EU, T3EU/R, AX, Wire, Connector

Storage Condition

Please store batteries at clean, cool (not over +30°C), dry and ventilated condition

Max Pulse Capability: Maximum Pulse capability reading over 3.0V at 150mA/0.1sec. every 2 min. at +20°C, 10μA/cm² base current with fresh batteries. The pulse capability can be different to the cell status, environment. For max. pulse coverage, capacitor support is recommended.

